

Aluminum Electrolytic Capacitors

EAR7-CD293 Snap-In Aluminum Electrolytic Capacitors

ELECSOUND®

Elecsound is a leading manufacturer of aluminum electrolytic capacitors. Mainly include radial type electrolytic capacitors and chip aluminum electrolytic capacitors.

Features:

- Load life 2000 hours at 85 °C
- High ripple current
- Smaller size
- Used in PCB Mounting
- Rohs Compliant

Specifications:

Operating Temperature Range(°C): -40~+85 & -25~+85@450V

Rated Voltage Range(V): 10~450

Nominal Capacitance Ranges(μF): 68~82000

Capacitance Tolerance(20 °C,120Hz) : 20%

Leakage current(μA): 0.01CV or 1.5mA whichever is smaller(at 25 °C ,after 5 minutes) C:Nominal Capacitance(μF) V:Rated Voltage(V)



Dissipation Factor(25 °C,120Hz)

Rated voltage(v)	Cap(μF)	10~16	25	35~50	63	80~100
2700		-	-	0.2	0.15	0.15
3300~4700		-	0.35	0.25	0.2	0.15
5600~6800		0.4	0.35	0.3	0.2	0.2
≥8200		0.4	0.35	0.35	0.25	

Rated voltage(v)	ΦD(mm)	160~200	250~450
22~30	0.1	0.15	
35	0.12	0.15	

Temperature Stability(120Hz)

Rated voltage(v)	10	16~35	50~100	160~200	250~400	450~500
Z-25 °C/Z+20°C	5	4	3	3	4	4
Z-40 °C/Z+20°C	18	15	10	6	8	-

Load Life(+85 °C)

Time	2000 hours	Time	1000 hours
Leakage Current	Not more than the specified value.	Leakage Current	Not more than the specified value.
Capacitance Change	Within ±20% of the initial value.	Capacitance Change	Within ±15% of the initial value.
Dissipation Factor	Not more than 200% of the specified value.	Dissipation Factor	Not more than 200% of the specified value.

After test:Rated Voltage to be applied for 60 minutes, 24 to 48 hours before measurement.

Shelf Life(+85 °C)


Frequency coefficient

Frequency (Hz)	50Hz	120Hz	1KHz	10KHz	100K
Rated Voltage (V)					
≥ 50	0.95	1.00	1.10	1.15	1.15
63~100	0.95	1.00	1.16	1.30	1.33
≥ 160	0.95	1.00	1.20	1.50	1.55

Temperature coefficient

Temperature (°C)	+40	+55	+70	+85
Rated voltage (V)				
<160	2.1	1.8	1.5	1.0
≥ 160	1.7	1.5	1.3	1.0

Dimensions : (Unit:MM)

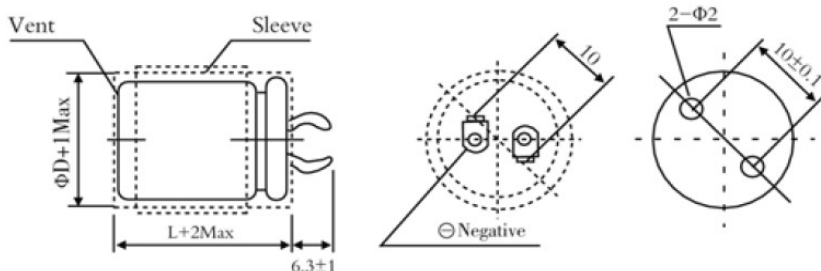

Elecsound Technology Company Limited

TEL: 0086-755-82908842 FAX: 0086-755-83045964

Website: www.elecsound.com

Email: sales@elecsound.com

Aluminum Electrolytic Capacitors

EAR7-CD293 Snap-In Aluminum Electrolytic Capacitors

ELECSOUND®

Standard Ratings

WV(V)	10		16		25		35		50		63		80		100	
	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms
22x25	10000	2.5	8200	2.2	5600	2.0	3300	1.8	2200	1.7	1500	1.6	1000	1.3	680	1.1
22x30	15000	3.2	10000	2.6	6800	2.3	3900	2.1	2700	1.9	2200	2.0	1200	1.5	820	1.2
22x35	18000	3.6	12000	2.9	8200	2.6	5600	2.3	3900	2.1	2700	2.2	1800	1.9	1200	1.6
22x40	22000	4	15000	3.3	10000	2.9	6800	2.9	4700	2.4	3300	2.3	2200	2.1	1500	1.8
22x45	-	-	18000	3.8	12000	3.3	-	-	-	-	3900	2.5	-	-	-	-
22x50	-	-	22000	4.2	-	-	8200	2.8	5600	2.5	-	-	2700	2.5	1800	2.1
25x25	15000	3.1	10000	2.6	6800	2.3	4700	2.2	2700	1.9	2200	2.0	1500	1.7	1000	1.4
25x30	18000	3.6	15000	3.3	10000	2.8	5600	2.3	3900	2.1	2700	2.3	1800	1.9	1200	1.6
25x35	22000	4.1	18000	3.7	12000	3.2	6800	2.6	4700	2.4	3300	2.3	2200	2.2	1500	1.7
25x40	33000	4.6	22000	4.2	15000	3.7	8200	2.8	5600	2.5	3900	2.6	2700	2.5	1800	2.0
25x45	39000	5.2	27000	5.0	-	-	10000	3.1	6800	2.8	5600	3.1	3300	2.8	2200	2.2
25x50	47000	5.8	-	-	18000	4.3	12000	3.5	8200	3.2	-	-	3900	3.1	2700	2.6
30x25	22000	4.1	15000	3.4	10000	3.0	6800	2.7	3900	2.4	3300	2.3	2200	2.2	1500	1.8
30x30	33000	4.8	22000	4.2	12000	3.4	8200	2.8	5600	2.5	3900	2.6	2700	2.5	1800	2.1
30x35	39000	5.3	27000	5.0	18000	4.2	10000	3.2	6800	2.8	5600	3.2	3300	2.8	2200	2.3
30x40	47000	6.0	33000	5.6	22000	4.8	12000	3.5	8200	3.0	6800	3.6	3900	3.2	2700	2.7
30x45	56000	6.7	39000	6.2	-	-	15000	4.1	10000	3.4	-	-	4700	3.6	3300	3.0
30x50	68000	7.5	47000	7.0	-	-	18000	4.6	12000	3.8	8200	3.7	5600	3.5	3900	3.4
35x25	33000	4.8	22000	4.4	15000	3.9	8200	2.9	5600	2.6	3900	2.7	2700	2.5	1800	2.2
35x30	47000	6.0	33000	5.6	18000	4.4	12000	3.6	8200	3.0	5600	3.3	3900	3.2	2200	2.5
35x35	56000	6.8	39000	6.3	22000	5.0	15000	4.1	10000	3.4	6800	3.7	4700	3.6	3300	3.1
35x40	68000	7.7	47000	7.2	33000	6.5	18000	4.7	12000	3.8	8200	3.8	5600	3.5	3900	3.4
35x45	82000	8.7	56000	8.0	39000	7.5	22000	5.3	-	-	10000	4.3	-	-	-	-
35x50	-	-	-	-	-	-	27000	7.0	15000	4.5	12000	4.8	6800	4.1	4700	4.0

WV(V)	160		180		200		250		315		350		400		450	
	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms	Cap μF	Ripple Arms
22x25	330	1.3	270	1.2	220	1.1	180	0.94	100	0.67	82	0.64	68	0.55	-	-
22x30	390	1.5	330	1.4	330	1.4	220	1.1	150	0.85	120	0.82	100	0.7	68	0.57
22x35	560	1.9	470	1.7	390	1.6	270	1.2	180	0.96	150	0.94	120	0.79	100	0.72
22x40	680	2.1	560	1.9	470	1.8	330	1.4	220	1.1	180	1.1	150	0.9	120	0.8
22x45	-	-	-	-	560	2.0	390	1.6	270	1.2	220	1.2	180	1	-	-
22x50	820	2.5	680	2.3	-	-	470	1.8	-	-	-	-	220	1.1	150	0.95
25x25	390	1.5	390	1.5	330	1.4	220	1.1	150	0.85	120	0.81	100	0.7	-	-
25x30	560	1.9	470	1.7	390	1.6	300	1.4	180	0.96	150	0.94	150	0.89	100	0.73
25x35	680	2.2	560	2.0	560	2.0	390	1.6	220	1.1	220	1.2	180	1	120	83
25x40	820	2.4	680	2.2	680	2.3	470	1.8	270	1.3	-	-	220	1.2	150	0.95
25x45	1000	2.7	820	2.5	-	-	560	2.0	330	1.4	270	1.4	270	1.3	180	1.1
25x50	1200	3.1	1000	2.9	820	2.6	-	-	390	1.6	330	1.6	-	-	220	1.2
30x25	560	2.0	470	1.8	470	1.9	330	1.5	220	1.1	180	1.1	150	95	-	-
30x30	820	2.5	680	2.3	560	2.1	470	1.8	270	1.3	220	1.2	180	1.1	150	0.98
30x35	1000	2.8	820	2.6	680	2.4	560	2.0	330	1.4	270	1.4	220	1.2	180	1.1
30x40	1200	3.2	1000	2.9	820	2.7	680	2.3	390	1.6	390	1.7	270	1.4	220	1.3
30x45	1500	3.7	1200	3.3	1000	3.1	820	2.6	470	1.8	470	2.0	330	1.6	270	1.4
30x50	-	-	-	-	1200	3.4	-	-	560	2.0	-	-	390	1.8	-	-
35x25	820	2.4	680	2.2	560	2.0	470	1.9	270	1.3	220	1.3	180	1.2	180	1.2
35x30	1000	2.7	820	2.5	820	2.5	680	2.4	390	1.6	330	1.6	270	1.5	220	1.3
35x35	1200	3.0	1200	3.1	1000	2.8	820	2.6	470	1.8	390	1.8	330	1.7	270	1.5
35x40	1500	3.5	-	-	1200	3.2	1000	3.0	560	2.0	470	2.0	390	1.8	-	-
35x45	1800	3.9	1500	3.6	-	-	1200	3.4	680	2.3	560	2.3	470	2.1	390	1.9
35x50	2200	4.5	1800	4.1	1500	3.8	-	-	-	-	680	2.6	560	2.3	470	2.2

Rated Ripple Current: 85 °C, 100Hz or 120Hz

The Specific capacitance and case size are available on request by customer