

# Single turn Potentiometer

## ET3362 Cermet Trimming Potentiometer

**ELECSOUND®**

Elecsound is a leading manufacturer of trimming potentiometers with more than 10 years experiences in manufacturer. Our factory is located in Chengdu, China. Our products include: 3006, 3262, 3266, 3269, 3296, 3299, 3303, 3306, 3309, 3318, 3323, 3329, 3362, 3386, 3540 and 3590.

Square/Single-Turn/ Cermet/ Industrial/ Sealed

10 Terminal Styles

Rohs Compliant

### Electrical Characteristics

Standard Resistance Range: 10Ω - 2MΩ

Resistance Tolerance: ±10% std.

Absolute Minimum Resistance: ≤1% or 2Ω

Contact Resistance Variation: ≤3% or 3Ω

Insulation Resistance : R1 ≥ 1,000 MegΩ

Withstand Voltage : 700VAC

Effective Travel: 250° normal

### Environmental Characteristics

Power Rating:(315V max)0.5W@70°C,0W@125°C

Temperature Range: -55°C to +125°C

Temperature Coefficient: ±100ppm/°C

Vibration:10-500Hz,0.75mm,6Hour:ΔR≤±5%

Shock: 390m/s, 4000cycles, ΔR≤±5%

Endurance:0.5W@70°C,1000H,ΔR≤10%

Rotational Life: 200Cycles,ΔR≤±5%

### Physical Characteristics

Starting Torque: ≤30mN·m

Flammability: UL94V-0

Marking: Resistance code, Model

Standard Packaging: 50pcs per tube

### How To Order:

**ET3362 P - 1 - 502**

Model \_\_\_\_\_

Style \_\_\_\_\_

Standard or Modified Product Indicator \_\_\_\_\_


-1 = Standard Product

Resistance Code \_\_\_\_\_

### Standard Resistance Table:


Resistance (Ohms)	Resistance Code
10	100
20	200
50	500
100	101
200	201
500	501
1000	102
2000	202
5000	502
10000	103
20000	203
25000	253
50000	503
100000	104
200000	204
250000	254
500000	504
1000000	105
2000000	205

Special Resistance Available

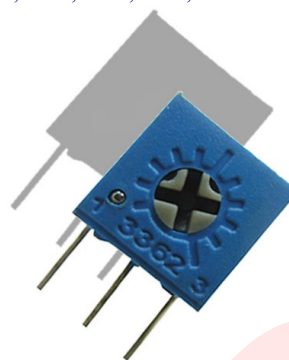


### ET3362 Common Dimension

#### Top Adjust




#### Side Adjust

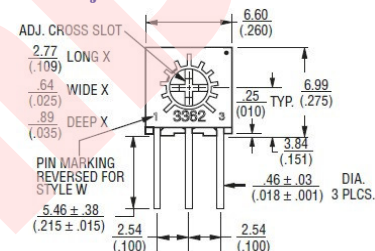


### ET3362 Adjust Method


#### ET3362F




#### ET3362M




#### ET3362H




#### ET3362S




#### ET3362P




#### ET3362W




#### ET3362R



#### ET3362X



#### ET3362U



#### ET3362Z

