

Trimmer Capacitors

EC8 5mm Ceramic Trimmer Capacitors

ELECSOUND®

Elecsound is a leading manufacturer of trimming potentiometers with more than 10 years experiences in manufacturer. Our factory is located in Chengdu, China. Our products include: 3006, 3262, 3266, 3269, 3296, 3299, 3303, 3306, 3309, 3318, 3323, 3329, 3362, 3386, 3540 and 3590.

Single-Turn / Cermet / Industrial
4 Terminal Styles
Rohs Compliant

Operating Temperature Range: -25°C to +85°C
Rated Working Voltage: 100VDC
Withstanding Voltage: 400VDC
Insulation Resistance : 100000M ohm min
Raotaion Torque: 35-200g·cm
Soldering Temperature : 250±5°C



Performance Parameters

Part No.	Mini. Capacitance(PF)	Max. Capacitance(PF)	Temp.Coeff PPM/°C	Q Factor @ 1MHz Cmax
EC8-030-Style(V,R,N,B)	1.3PF max	3.0PF +50% -0%	NP 0 ± 250	>500
EC8-050-Style(V,R,N,B)	2.0PF max	5.0PF +50% -0%	NP 0 ± 250	>500
EC8-100-Style(V,R,N,B)	3.0PF max	10.0PF +50% -0%	N 450 ± 300	>500
EC8-200-Style(V,R,N,B)	4.2PF max	20.0PF +50% -0%	N 450 ± 300	>500
EC8-300-Style(V,R,N,B)	5.2PF max	30.0PF +50% -0%	N 750 ± 300	>500
EC8-400-Style(V,R,N,B)	6.8PF max	40.0PF +50% -0%	N 1200 ± 500	>300
EC8-500-Style(V,R,N,B)	9.0PF max	50.0PF +50% -0%	N 1200 ± 500	>200
EC8-600-Style(V,R,N,B)	11.0PF max	60.0PF +50% -0%	N 1200 ± 500	>200
EC8-700-Style(V,R,N,B)	13.0PF max	70.0PF +50% -0%	N 1200 ± 500	>200

Diameter And Size(Unit: mm)





■ BOTH TYPE

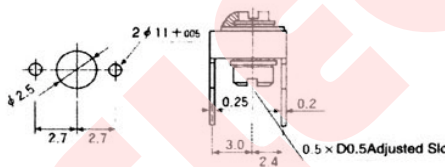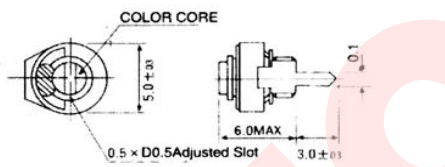



SUGGESTED MOUNTING HOLES

■ NORMAL TYPE

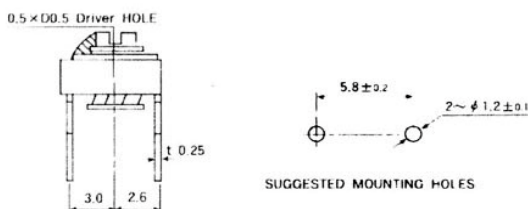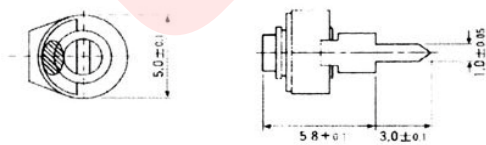


SUGGESTED MOUNTING HOLES

■ VERTICAL TYPE

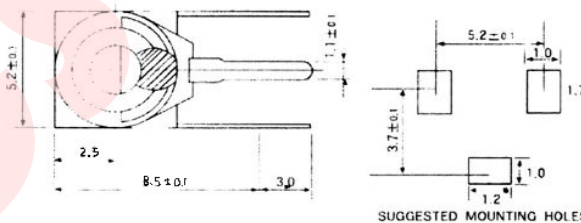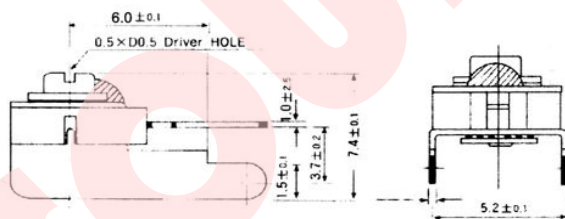

SUGGESTED MOUNTING HOLES

■ REAR ADJUSTING TYPE

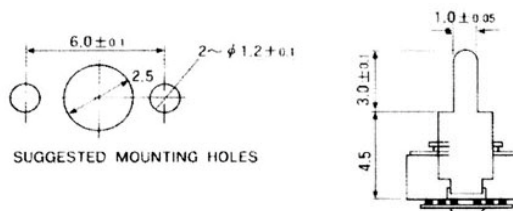

SUGGESTED MOUNTING HOLES

